

Conveyors are for illustration purposes only

Fast Framer Gen III


For more information please visit
www.multinailmachinery.com

155 Burnside Rd · STAPYLTON · QLD 4207 Australia
T: + 61 (0)7 3297 3280 · F: + 61 (0)7 3382 0741
E: enquiry@multinailmachinery.com · W: www.multinailmachinery.com


**MULTINAIL**
Machinery




Fast Framer Gen III

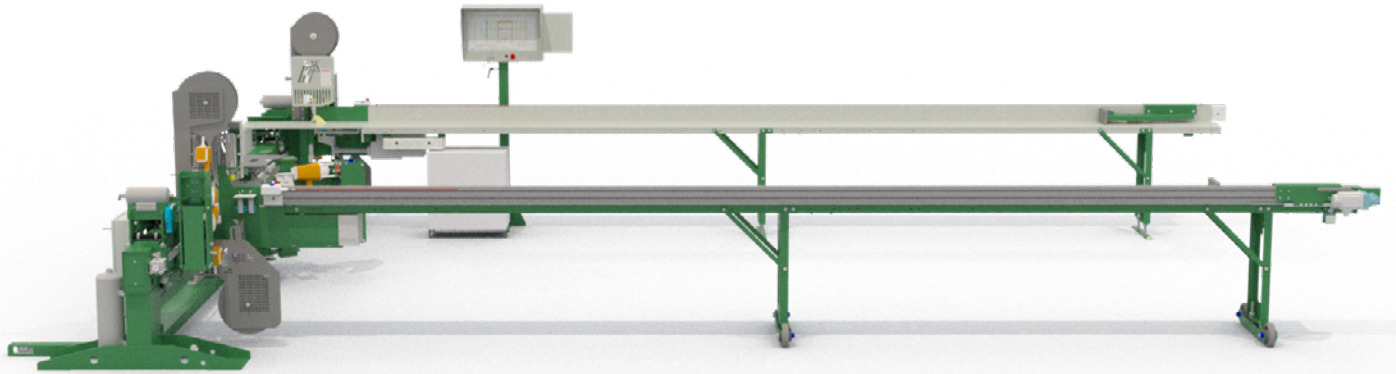

Top view

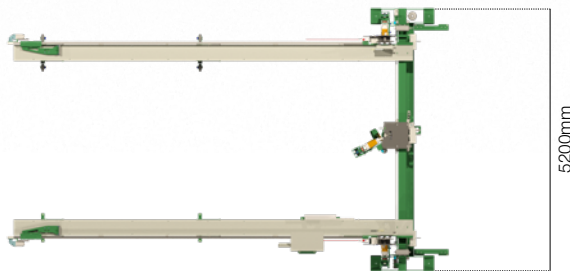

Side view

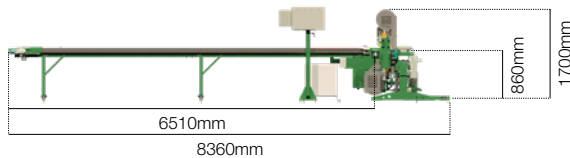

Features

- Four gun mounted brackets
- Height adjustable nail gun & clamp guarding
- Vertical clamp override mechanism to allow stud adjustment once clamped.
- Adjustable for wall frame heights from 1800 - 3600 mm.
- Quick change over from 70 mm to 120 mm wall thickness.
- Two handed operation safety circuit.

Options

- Left or right hand side adjustable.

Specifications

Wall height	1800 - 3600 mm
Air supply required	100 - 110 PSI
Timber widths	70 - 120 mm
Throat opening	150 mm