


Connector Plate

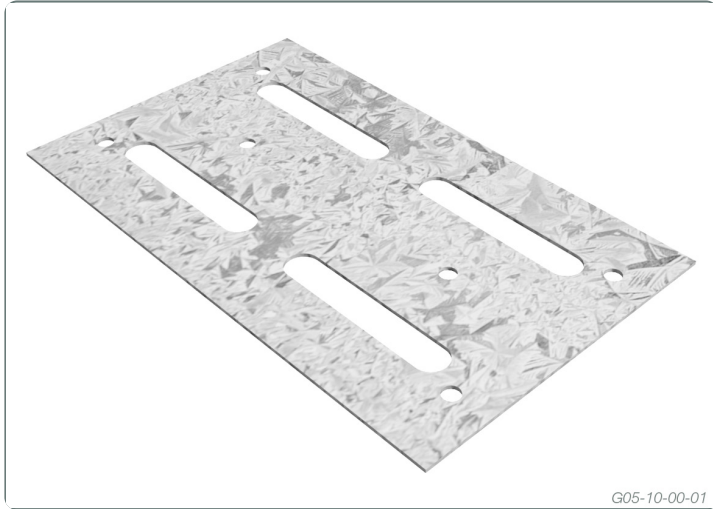

Multipurpose timber connector for joining timber with timber

These pre-punched and formed galvanized steel timber connectors are ideal for:
Joining timber side by side and for butting timber members together.
Formwork, house frames and joining wall frames at top plate level.
Fast construction joining of timber frames using nails.

TYPICAL APPLICATIONS

Multinail Connector plate is easy to install. Simply use 3/30mm x 2.8Ø Multinail galvanised nails to each connecting member to achieve the maximum load as per table below.



LIMIT STATE DESIGN LOADS


Load Case	Limit State Design Capacity (kN) for all sizes in the range					
	J2	J3	J4	JD3	JD4	JD5
Dead Load	1.6	1.2	0.8	1.6	1.2	1.0
Dead Load + Wind Load	3.2	2.3	1.6	3.3	2.4	1.9

NOTES: The uplift in capacities are derived from AS1720-2010 and are for houses where failure is unlikely to affect an area greater than 25m². For primary elements in structures other than houses or elements in a house for which failure would be greater than 25m² these capacities must be multiplied by 0.94. For primary joints in essential services or post disaster buildings multiply by 0.88.

DESCRIPTION AND PACKAGING

Manufactured from 0.8mm Galvanised G300 Z275 Steel

Description	Product Code	Reference Code	Carton quantity	Carton kg.
100 x 60	CP10060	CP10060	100	5.0
30mm x 2.8Ø Multinail Nails (TA302)				

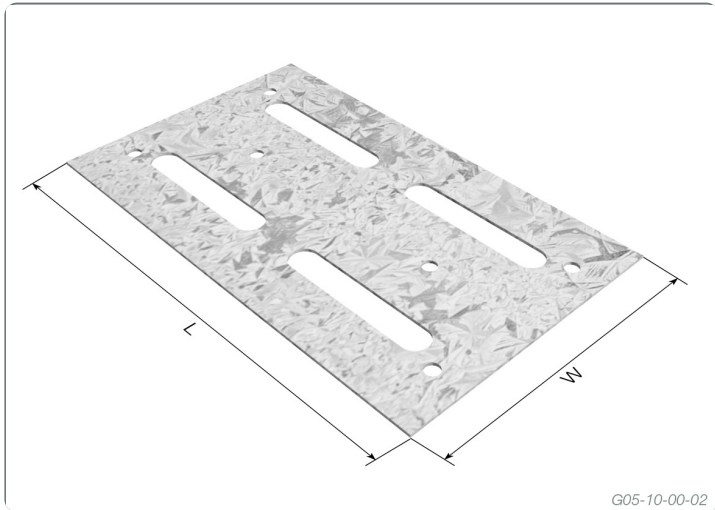

Due to continual product improvement Multinail Australia Pty Ltd. reserves the right to change the product/s depicted - both in description and specification. This document has to be read in conjunction with Multinail's Technical Manual.