


## Apex Plate

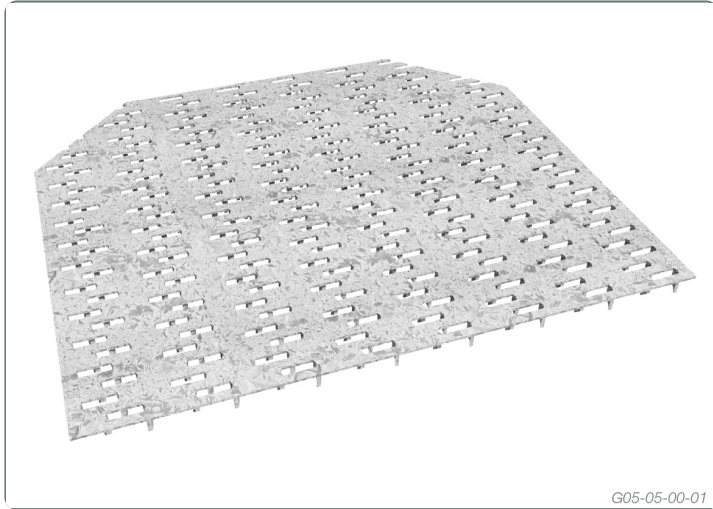

Formed galvanised steel connector designed to provide an effective means of fastening two timber members together under high loads

These formed galvanised steel connectors:  
Incorporate preformed teeth making it quick and easy to press into timber.  
Teeth are spaced accordingly to eliminate timber splitting.  
Twisted tooth provide reduces tooth withdrawal.

### NAILPLATES

Multinail nailplates incorporate many refinements, particularly in the tooth profile and size, that is designed to grip the timber more securely. The bending and twisting of teeth during manufacture was carefully designed to aid the transfer of forces across the finished joint.


The nailplate is the ideal choice of fabricators for the joining of multiple timber members as they are designed to provide excellent holding power (with eight teeth per square inch) at a low cost per truss.

Nailplate have a uniquely-designed tooth shape that gives the nailplate full penetration and holding power


### TYPICAL APPLICATIONS

Nailplates are used in the manufacture of timber roof truss, floor trusses and butt jointed timber members like roof rafters and floor joists.

#### Roof Trusses

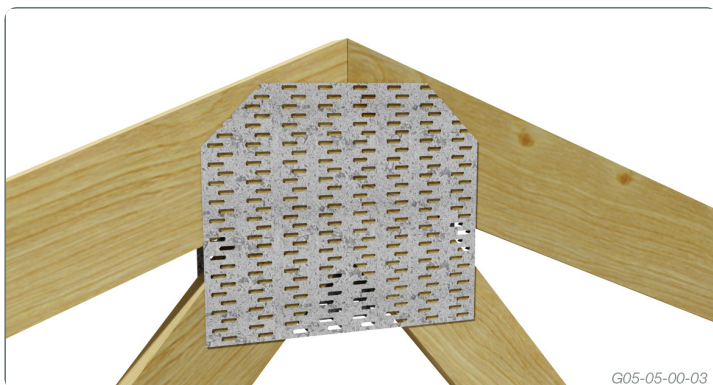

#### Roof Trusses

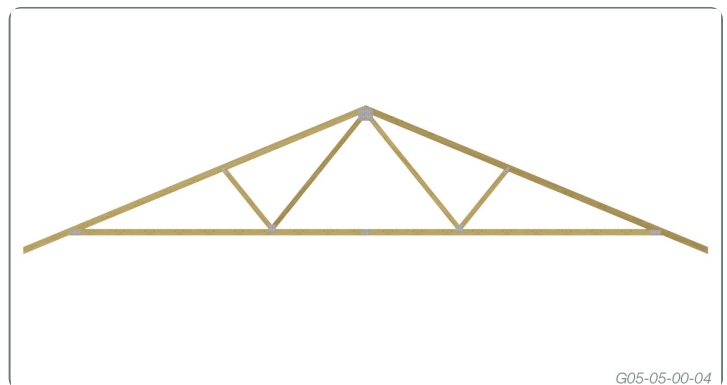


### FEATURES

- Long teeth
- Low plate cost per truss
- Penetrates high density hardwoods
- Eliminates tooth bending and wood splitting
- High force transfer per unit area
- High holding power in hardwoods and softwoods
- Prime quality galvanised steel

DESCRIPTION AND PACKAGING

Manufactured from 1.0mm Galvanised G300 Z275 Steel

Description	Product Code	Reference Code	Carton quantity	Carton kg.
175 x 200	TA200	AP175200	48	14.8

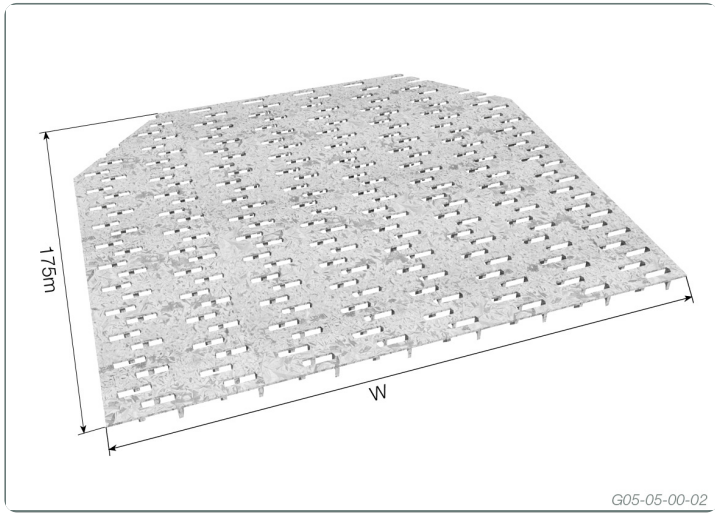

Due to continual product improvement Multinail Australia Pty Ltd. reserves the right to change the product/s depicted - both in description and specification. This document has to be read in conjunction with Multinail's Technical Manual.